

Low-resistance measurements in accordance with all major safety standards



Main applications

The **3157-01** passes a large AC current through the measurement object and measures the voltage drop according to the AC 4-terminal method, making it possible to measure very low resistance values.

- Protective grounding checks of medical and general electrical equipment
- Ground connection tracing of machine tools and wiring panels
- Safeguard and equal-potential connection checks of medical installations
- High-current behavior evaluation of connections

Major features

■ Compliant with a multitude of standards

The **3157-01** allows measurement as prescribed by most major safety standards. Using the 4-terminal method to measure the voltage drop for a high current, the unit offers evaluation features and a timer function to allow efficient standard compliance testing.

■ Constant-current testing (max. 31.0 A) with feedback control

The output current is controlled by a feedback loop to achieve stability, regardless of fluctuations in the load impedance.

■ Test data count function

For installations with many test points, the unit can automatically count the number of tests, to ensure that no points are missed.

■ Setting value store function

Up to 20 settings can be stored, allowing quick switching between the various setups for different standards and legal requirements.

■ [SOFT START] function

The unit checks whether the probe is connected to the measurement object, and raises the output current to the preset value when a connection is detected. This serves to prevent sparks caused by connecting a live probe to a measurement object, thereby guarding against equipment damage and ensuring operator safety.

■ Fluorescent tube display (VFD)

The display uses an easy to read fluorescent tube. Compared to conventional meters, the digital indication allows effortless reading of the data.

■ Light weight and compact dimensions

Whereas conventional testing equipment required a trolley for transport, the 3157-01 can be easily carried with one hand. Its small dimensions, light weight, and ease of maintenance make it ideal for use in the field.


[320 (W) × 90 (H) × 263 (D) mm
12.6" (W) × 3.56" (H) × 10.40" (D)
7 kg(247.2 oz)]

Standards supported by the 3157-01

- **IEC60065**
Safety requirements for mains operated electronic and related apparatus for household and similar general use
- **IEC60204-1**
Electrical equipment of industrial machines -Part1,General requirements
- **IEC60335-1**
Safety of household and similar electrical appliances - Part 1, General requirements
- **IEC60601-1**
Medical electrical equipment -Part 1, General requirements for safety
- **IEC60950**
Safety of data processing equipment, including office equipment
- **IEC61010-1**
Safety requirements for measurement, control, and laboratory electrical equipment
- **UL standard**
Relevant standards
(UL 1012, UL 1270, UL 1409, UL 1419, UL 1437, UL 2601, etc.)


A multitude of functions in a compact body

Easy standard testing

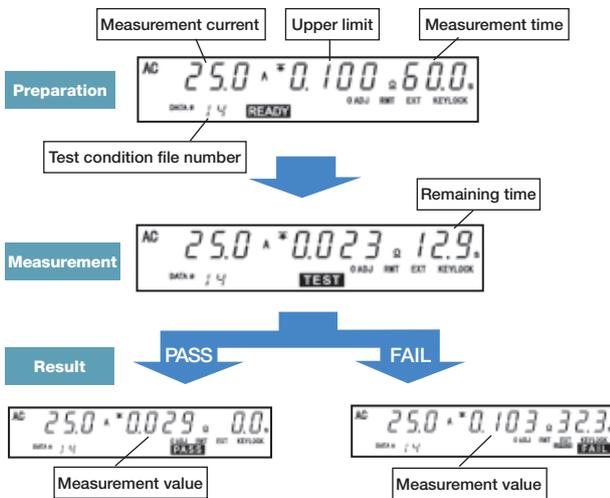

* If hold is not enabled, unit reverts to READY condition after 1 second.


Versatile functions

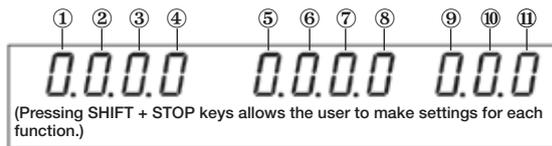

- ① **Output current frequency switching** (0: 50 Hz / 1: 60 Hz)
- ② **PASS/FAIL hold function setting**
 Determines whether the condition is held after detecting PASS or FAIL.

	0	1	2	3
PASS	NO	YES	NO	YES
FAIL	YES	YES	NO	NO
- ③ **Hold function setting** (0: Hold disabled / 1: Hold enabled)
 Holds the condition of the unit after the preset test time has elapsed or after the STOP key is pressed.
- ④ **Use test lower limit setting** (0: No / 1: Yes)
 Disabling the setting allows only the upper limit to be set. Enabling the setting allows also the lower limit to be set.
- ⑤ **Timer override** (0: No / 1: Yes)
 Determines whether a test time can be set. If test time is not set, the test ends only when the STOP key is pressed or the result is FAIL.

Measurement range

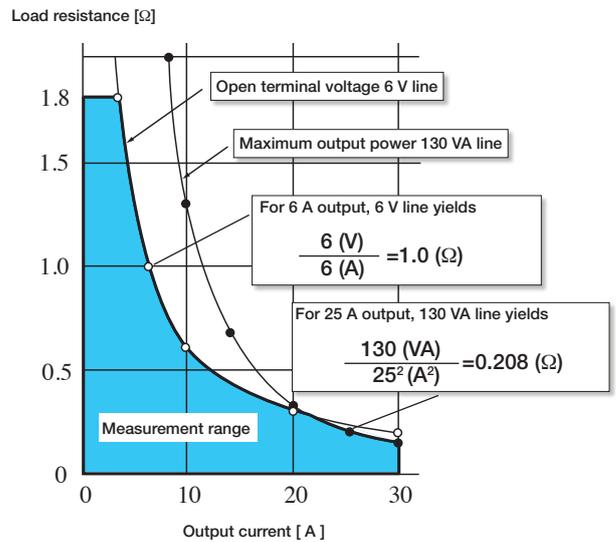

- ⑥ **Test data count function** (0: Disable/1: Enable)
 Allows counting of test points for equipment with many test points.
- ⑦ **Buzzer setting**

	0	1	2	3
Evaluation	ON	OFF	OFF	ON
Error	ON	OFF	ON	OFF
- ⑧ **Enable current control in test condition** (0: No/1: Yes)
 Allows changing of the output current value while a test is in progress.
- ⑨ **Momentary out**
 Enabling this function allows the current to be output only when the START key is pressed.
 0: Disabled (trigger operation)
 1: Enabled (momentary out operation)
- ⑩ **Test mode**
 0: Soft start mode
 1: Normal mode
 2: Continuous test mode
- ⑪ **Print function**
 0: Not used
 1: Automatically print PASS/FAIL result
 2: Optionally print in PASS/FAIL hold condition

External I/O

The unit comes with I/O connectors as standard equipment. The connectors allow external START/STOP control, READY/TEST status checking, and PASS/FAIL result reading. Photocouplers are used to isolate the I/O signals from the internal circuitry.

External interface (option)

The 9518-02 GP-IB interface or 9593-02 RS-232C interface can be installed in the unit. This allows remote control from a computer as well as export of measurement data. The 9593-02 RS-232C interface also allows connection of the 9442 printer for producing a hard copy of measurement data.



- Printing method** : Thermal serial dot printer
- Paper width** : 112 mm
- Printing speed** : 52.5 cps
- Power source** : 9443 AC adapter, or supplied nickel-hydrate battery (Charged through 9443; printing capability approx. 3000 lines with full charge)

* To use the 9442 printer, an optional 9593-02 RS-232C interface, 9446 connection cable, and AC adapter are required.

■ 3157-01 Specifications

● Basic specifications

Basic functions : AC 4-terminal method resistance measurement

[Generator section]

Current generator principle : PWM constant current control
Current setting range : 3.0 A - 31.0 A AC (0.1 A resolution), into 0.1Ω load range
Accuracy : ± (1% of setting + 0.2 A) within maximum output power range
Maximum output power : 130 VA (at output terminals) *
* Subject to derating according to ambient temperature [80% at 40°C (104°F)]
Open-terminal voltage : Max. 6 V AC
Generator frequency : 50 Hz or 60 Hz sine wave (selectable)
SOFT START function : Apply current only after checking load connection

[Monitor section]

Resistance measurement range : 0 - 1.800Ω (0.001Ω resolution)
Accuracy : ± (2% rdg. + 4 dgt.) after zero-adjust
Current monitoring range : 0 - 35.0 A AC (0.1 A resolution)
Accuracy : ± (1% rdg. + 5 dgt.) (at 3 A or more)

Voltage monitor range : 0 - 6.00 V AC (single range 0.01 V resolution)
Accuracy : ± (1% rdg. + 5 dgt.)
Monitoring cycle : 0.5 s

[Timer section]

Setting ON : Counts down time after start until preset time
Setting OFF : Shows elapsed time after start
Setting range : 0.5 - 999 s
Setting resolution : 0.1 s (0.5 - 99.9 s) / 1 s (100 - 999 s)
Accuracy : ±50 ms (0.5 - 99.9 s) / ±0.5 s (100 - 999 s)

[Other functions]

Comparator function : PASS/FAIL evaluation using preset upper/lower limit
Comparator result output : Internal buzzer (PASS/FAIL, ON/OFF switchable) and I/O output
Zero-adjust function : For measurement probe impedance cancellation
Zero-adjust range : 0 - 0.100Ω
Memory function : Max. 20 settings (with save/load)

● General Specifications

Display : Fluorescent tube (digital display)
Ambient conditions for use : 0 to +40°C (32 to 104°F), 90% rh or less (no condensation)
Ambient conditions for storage : -10 to +50°C (14 to 122°F), 95% rh or less (no condensation)
Ambient conditions for assured accuracy : 23°C ± 5°C (73°F ± 9°F)
90% rh or less (no condensation)
After 30-minute warmup period
Suitable environments : Indoors, altitude up to 2000 m
Power supply voltage range : 100 - 120 V/200 - 240 V AC (switching)
Power line frequency : 50 - 60 Hz
Withstand voltage : 1.35 kV AC, 20 mA, 1 min., between power supply and chassis
Maximum rated power : 350 VA (with optional equipment)
Fuse : 250VT3. 15AL
Compatible standards : 1. EMC : EN61326:1997+A1:1998 CLASS A
EN61000-3-2:1995+A1:1998+A2:1998
EN61000-3-3:1995
2. Safety : EN61010-1:1993+A1:1995
Contamination 2 Measurement category II
(expected overvoltage category 2500 V)


Interfaces : 1. External I/O *
Output signals: PASS /UP FAIL /LOW FAIL /TEST /READY open collector
Input signals: START /STOP /External I/O ENABLE 5 - 24 V DC
2. Front EXT connector *
External START/STOP input contact signal
* When external start/stop connector is used, START key is inactive
3. RS-232C or GP-IB (option; one only)
Remote control, measurement data output
(When RMT indicator is on, operation keys are locked; only LOCAL, STOP, and external keys work)
Dimensions : Approx. 320 (W) × 90 (H) × 263 (D)mm
Approx. 12.60" (W) × 3.54" (H) × 10.35" (D)
(Without protruding parts)
Mass : Approx. 7 kg/246.9 oz (without options)
Standard accessories : Power cord, spare fuse (integrated in inlet), shorting bar × 2 (current output - voltage sensing terminal)

3157-01 AC GROUNDING HI TESTER

* For measurement, two 9296 or one each of 9296 and 9297 are required.

■ Options

9296 CURRENT PROBE
9297 CURRENT APPLY PROBE

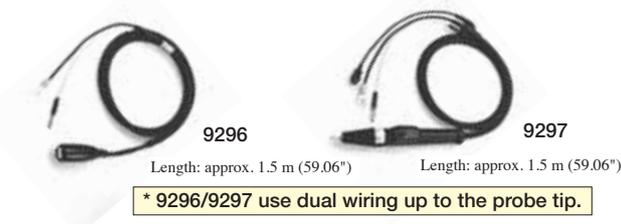

9518-02 GP-IB INTERFACE
9593-02 RS-232C INTERFACE (Not CE marked)
9442 PRINTER
1196 RECORDING PAPER (25m, 10 rolls)
9443-02 AC ADAPTER (for printer, EU)
~~9443-03 AC ADAPTER (for printer, America) ...Discontinued~~
9446 CONNECTION CABLE (for printer)
9613 REMOTE CONTROL BOX (SINGLE)
9614 REMOTE CONTROL BOX (DUAL)

Note: Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS:

81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL +81-268-28-0562 FAX +81-268-28-0568
http://www.hioki.com / E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION:

TEL +1-609-409-9109 FAX +1-609-409-9108
http://www.hiokiusa.com / E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) SALES & TRADING CO., LTD.:
TEL +86-21-63910090 FAX +86-21-63910360
http://www.hioki.cn / E-mail: info@hioki.com.cn

HIOKI INDIA PRIVATE LIMITED:

TEL +91-124-6590210 FAX +91-124-6460113
E-mail: hioki@hioki.in

HIOKI SINGAPORE PTE. LTD.:

TEL +65-6634-7677 FAX +65-6634-7477
E-mail: info-sg@hioki.com.sg

HIOKI KOREA CO., LTD.:

TEL +82-42-936-1281 FAX +82-42-936-1284
E-mail: info-kr@hioki.co.jp

DISTRIBUTED BY